



DURATION WINDOWS

Duraview Plus Sash Windows Section Identification

Contents




DURATION
WINDOWS


● Wall Chart	Page 3
● Cross Section Details	Page 4
● Plan View Details	Page 5
● Deep Bottom Rail	Page 6 - 8
● Coupling Bars	Page 9 - 10
● Fixed Lite Coupling	Page 11
● Projection Sub Cill Details	Page 12
● Cill Add Ons / Extensions	Page 13
● Bay Details	Page 14
● Liner Details	Page 15



All Profiles

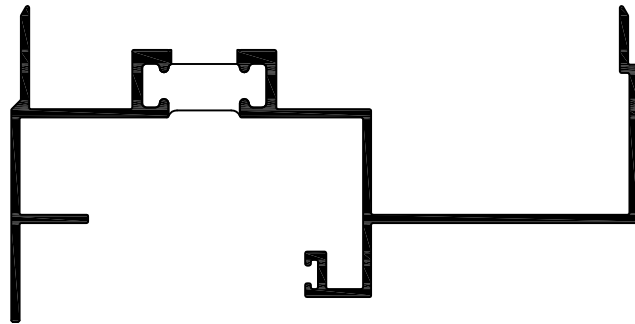

HEAD

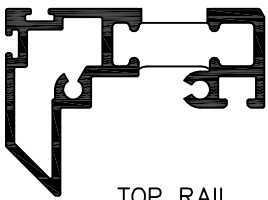

TOP RAIL



TOP INTERLOCK BEAD




GLAZING BEAD



APPLIED BEAD




PARTING BEAD

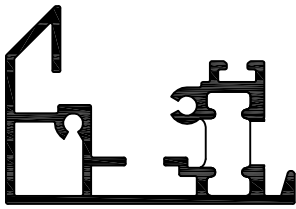


TOP INTERLOCK



INTERLOCK

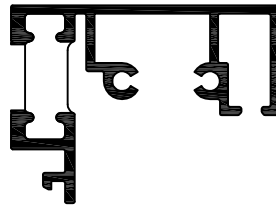

BTM INTERLOCK

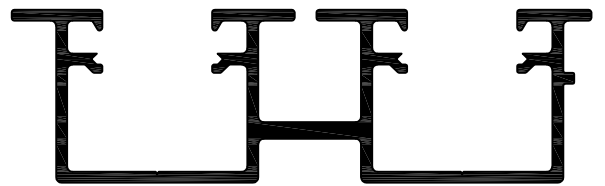


JAMB LINER




GLAZING BLOCK




BALANCE & CILL COVER

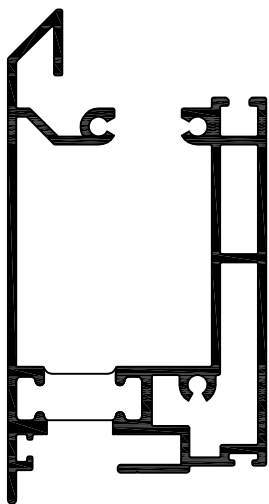


DEEP BTM RAIL

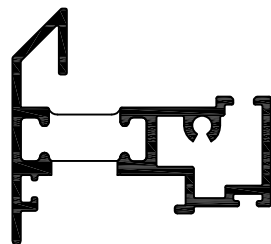


BOTTOM RAIL

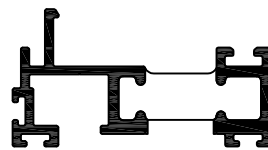


TOP VERTICAL STILE

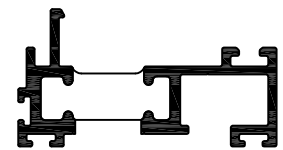

BOTTOM VERTICAL STILE

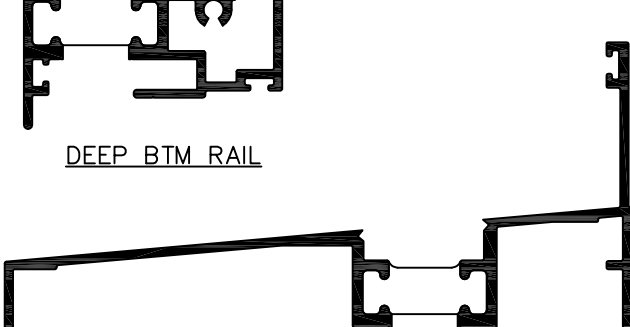

CILL

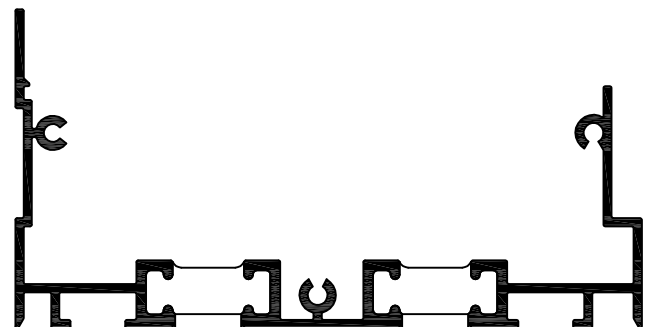


JAMB

Cross Section









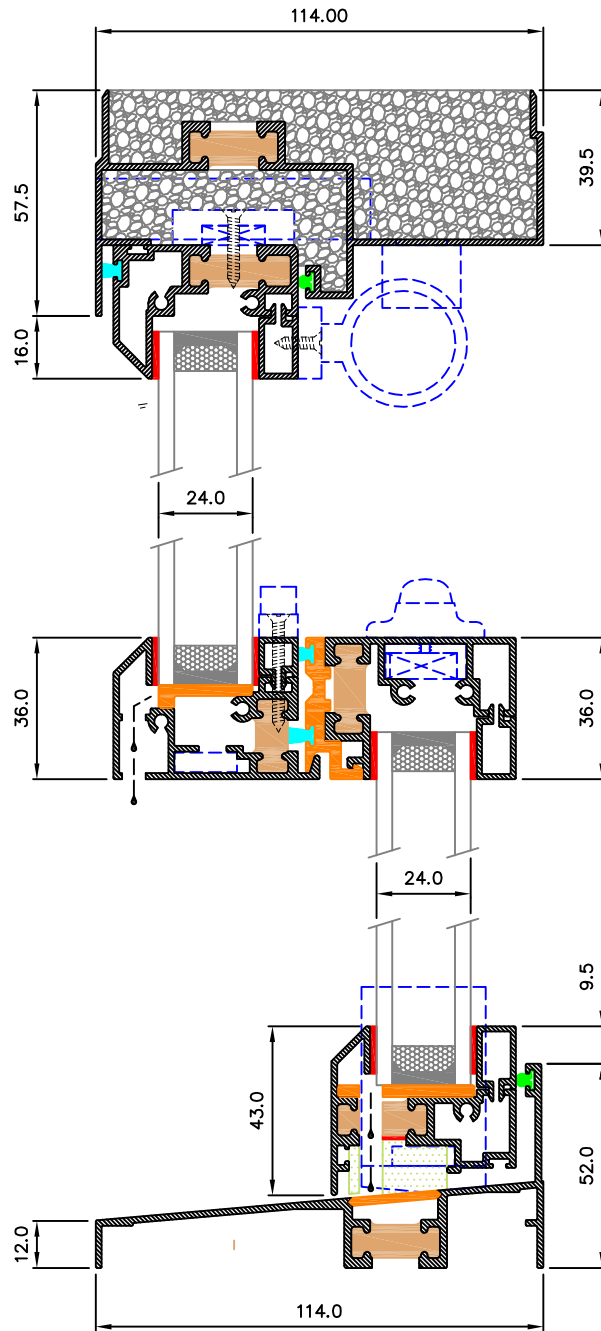





DURATION
WINDOWS

Head, Interlock & Cill Detail





KEY:

-  WOOLPILE
-  Q LON
-  EPDM
FOAM SEAL
-  HIGH SECURITY
TAPE (1.0mm x 12mm)
-  GLASS
-  SWISSPACER V
-  EXPANDED
POLYSTYRENE
-  THERMAL
BREAK
-  UPVC
PLASTIC
-  ALUMINIUM
-  SILICON SEALANT
APPLIED BY INSTALLER
-  4mm HEAVY DUTY
COUPLER



Jamb Section Detail

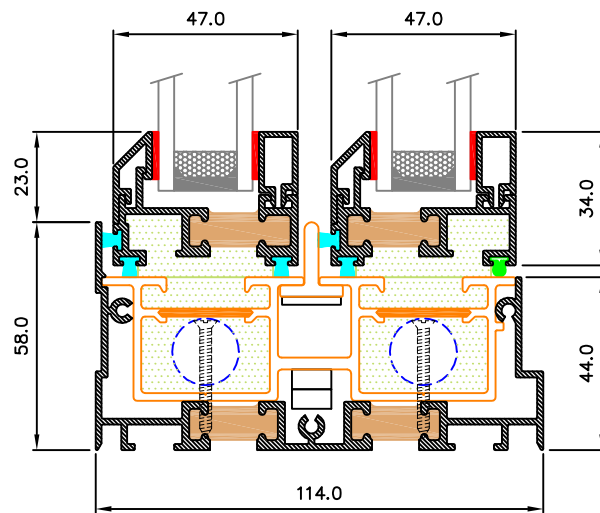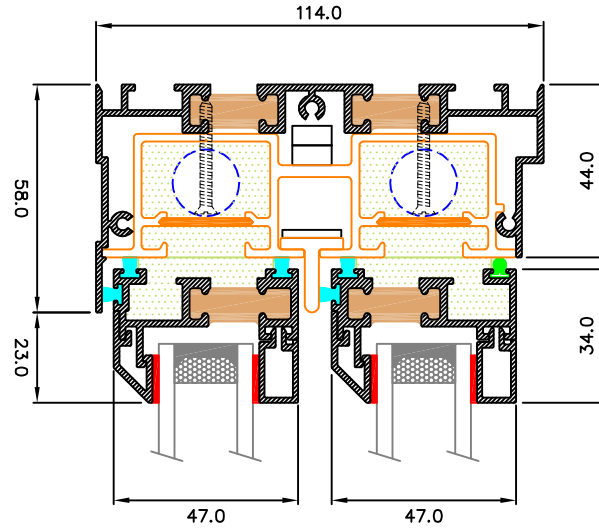


Deep Bottom Rail



DURATION
WINDOWS

Deep Bottom Rail Cross Section With A Standard Cill

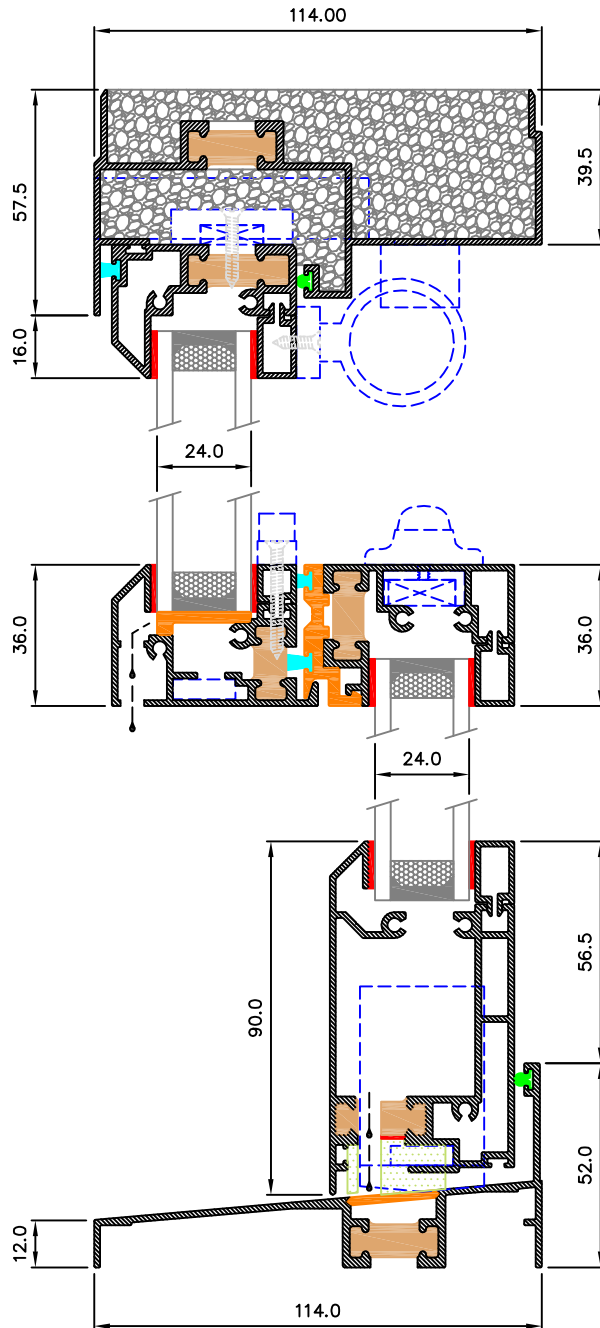


Deep Bottom Rail



DURATION
WINDOWS

Deep Bottom Rail Cross Section With 41mm Cill Add-on

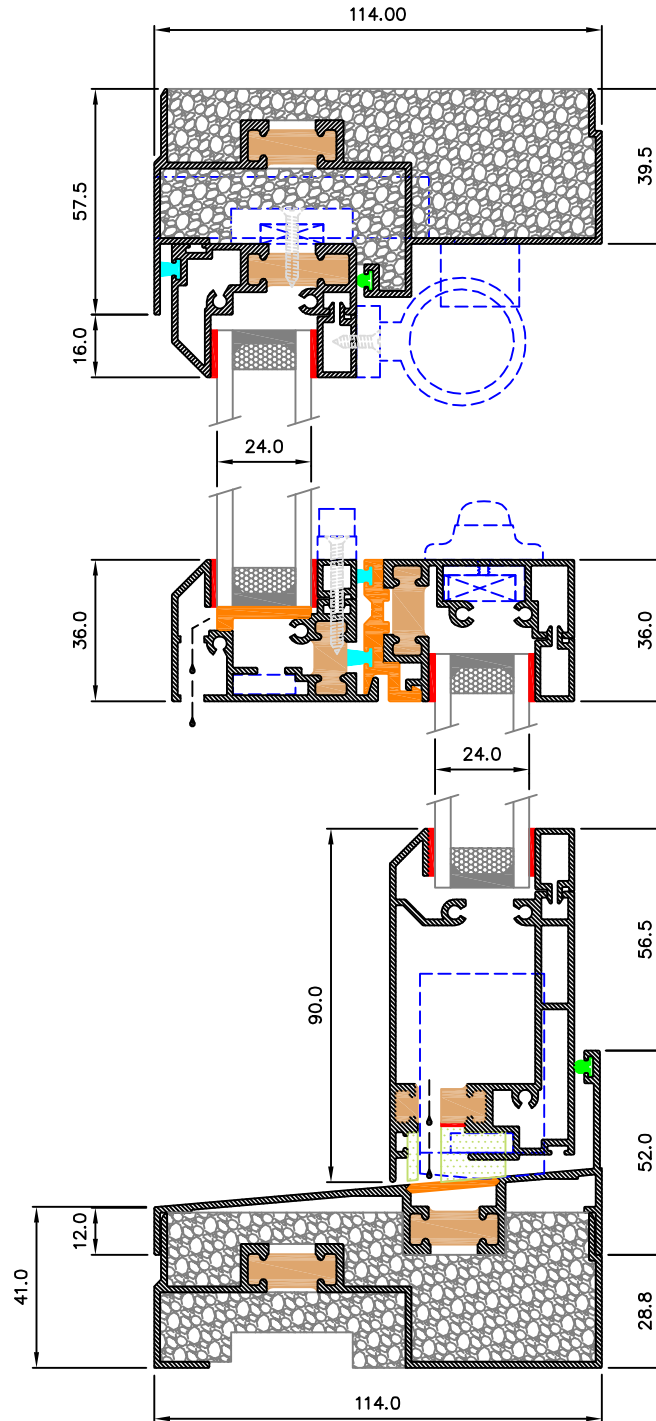


Deep Bottom Rail




DURATION
WINDOWS

Deep Bottom Rail Cross Section With 59mm Cill Add-on

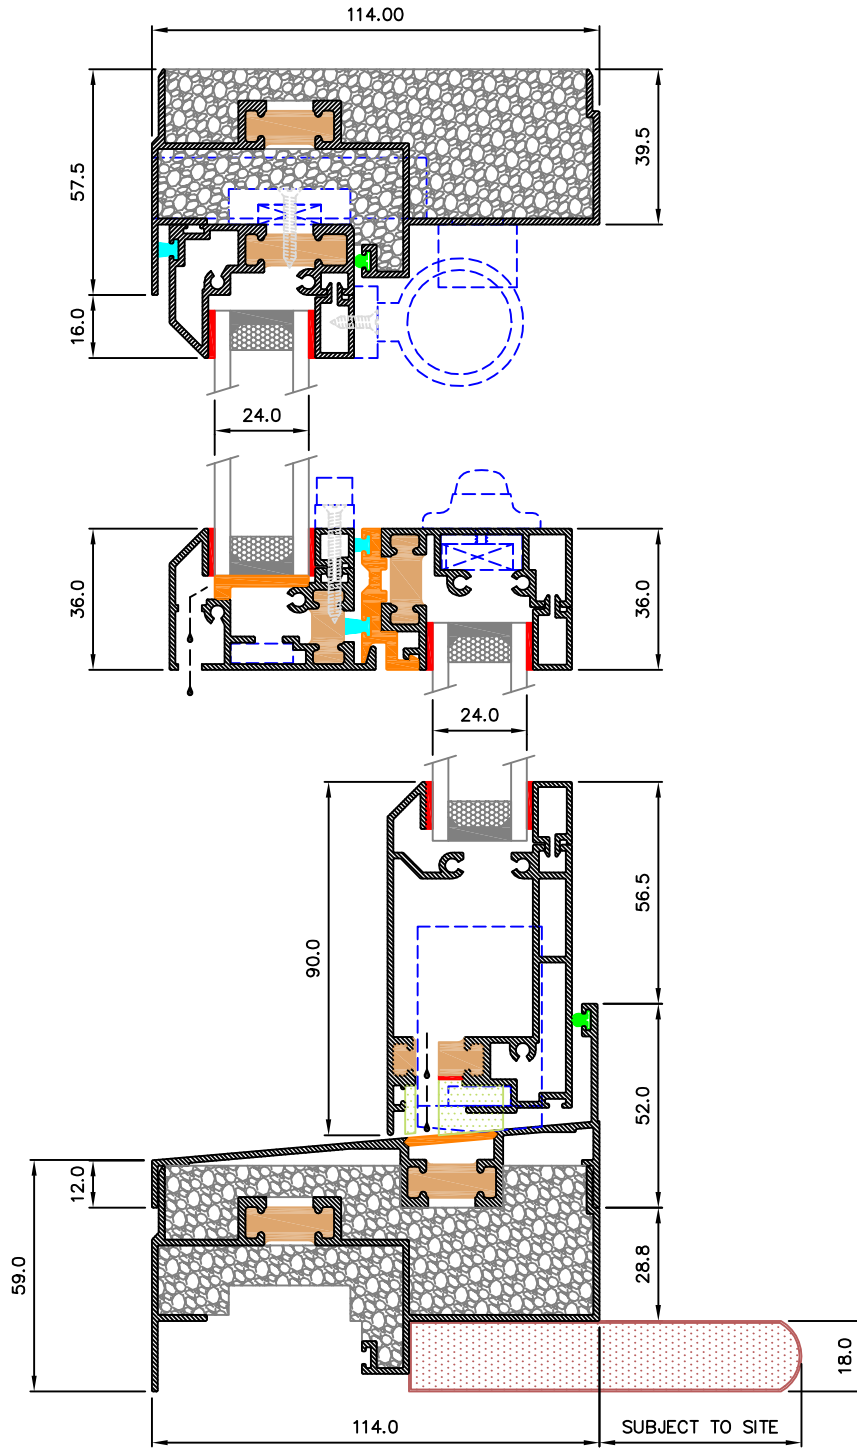



Heavy Duty Coupling Bar - Cross Section

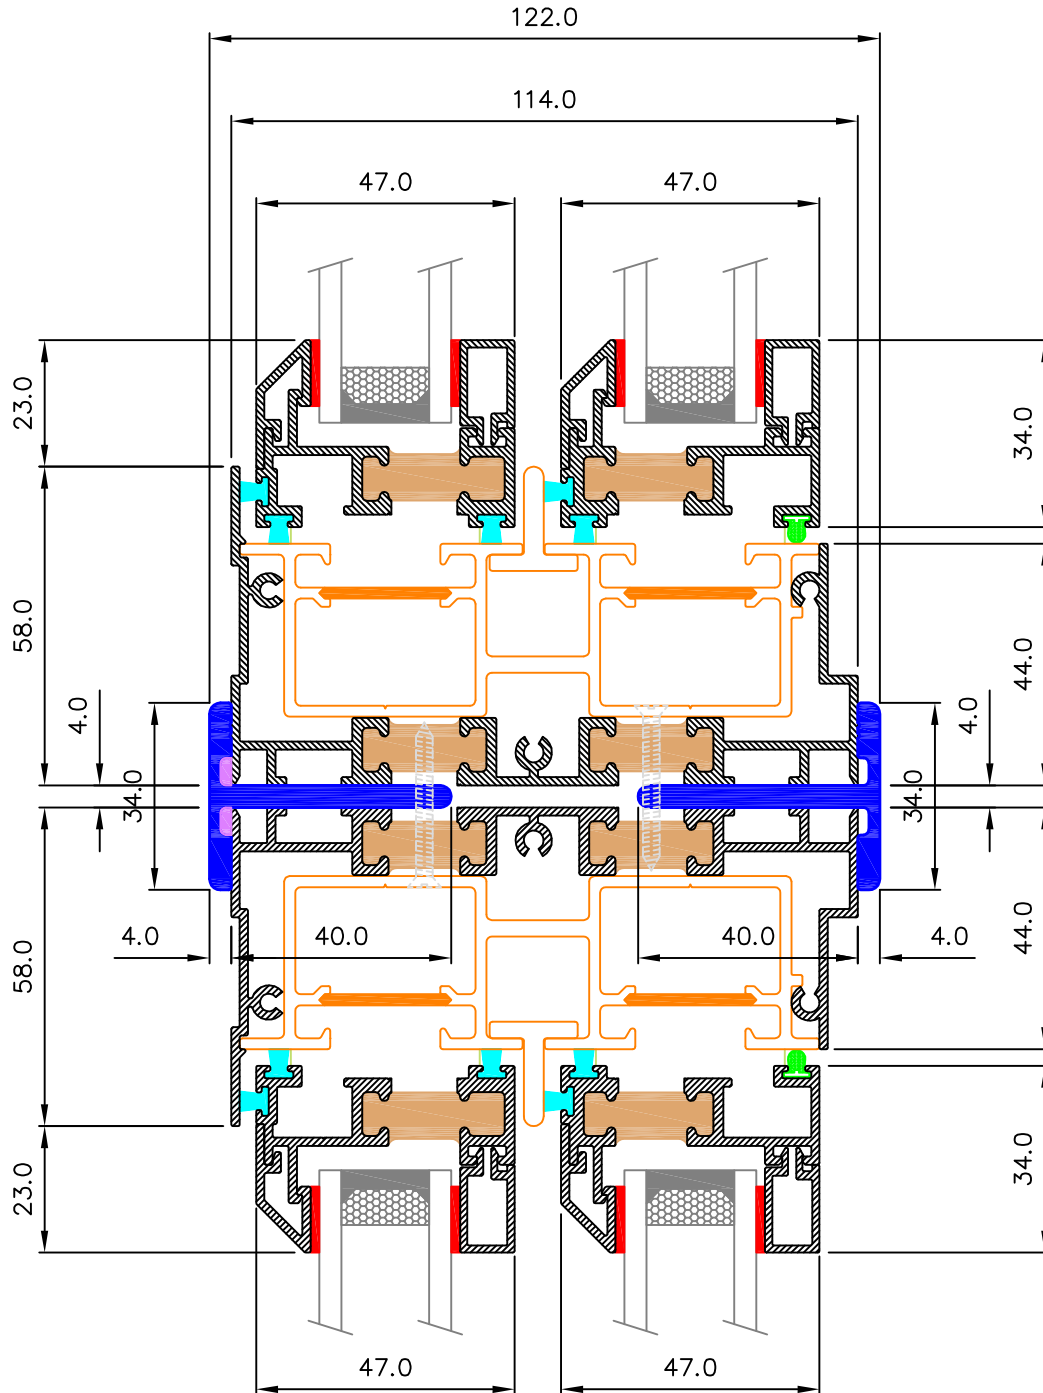


Coupling Bars



DURATION
WINDOWS

No Show Coupling Bar - Cross Section

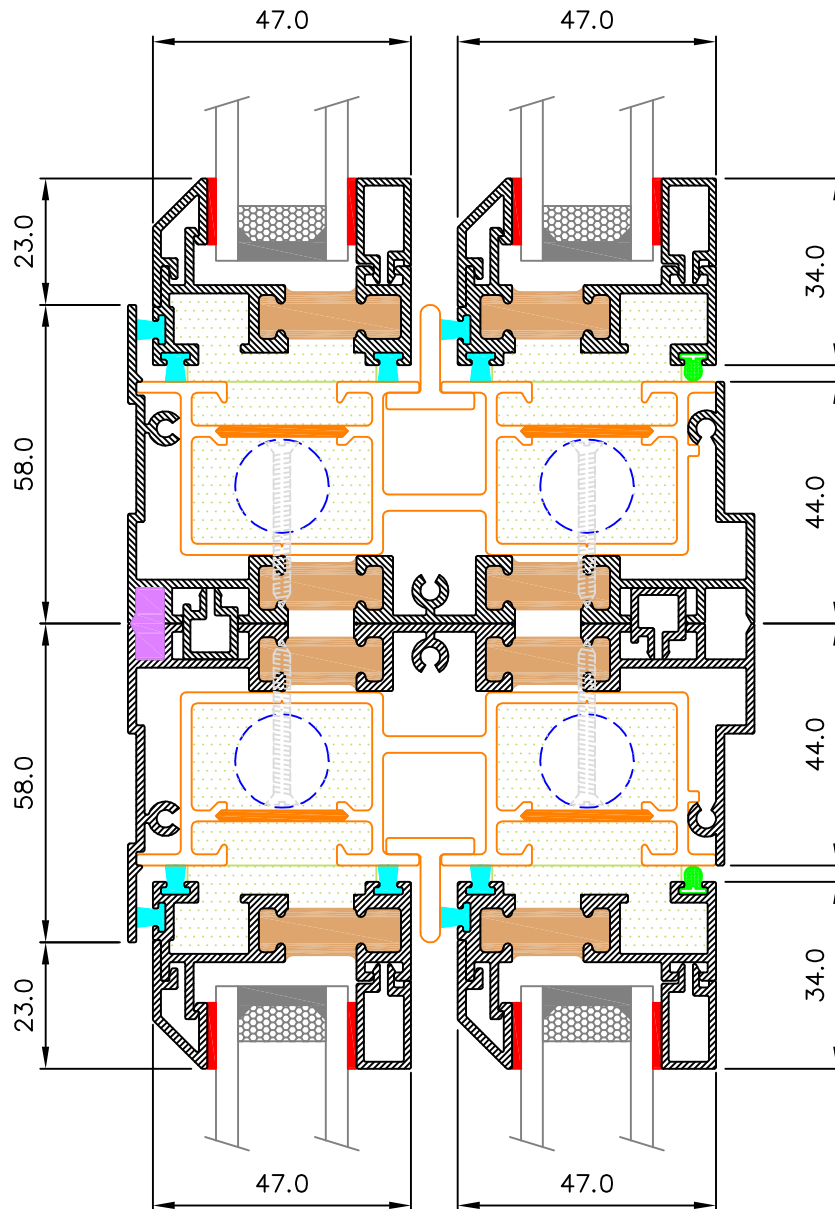


Fixed Lite Coupling



DURATION
WINDOWS

Fixed Lite - Cross Section

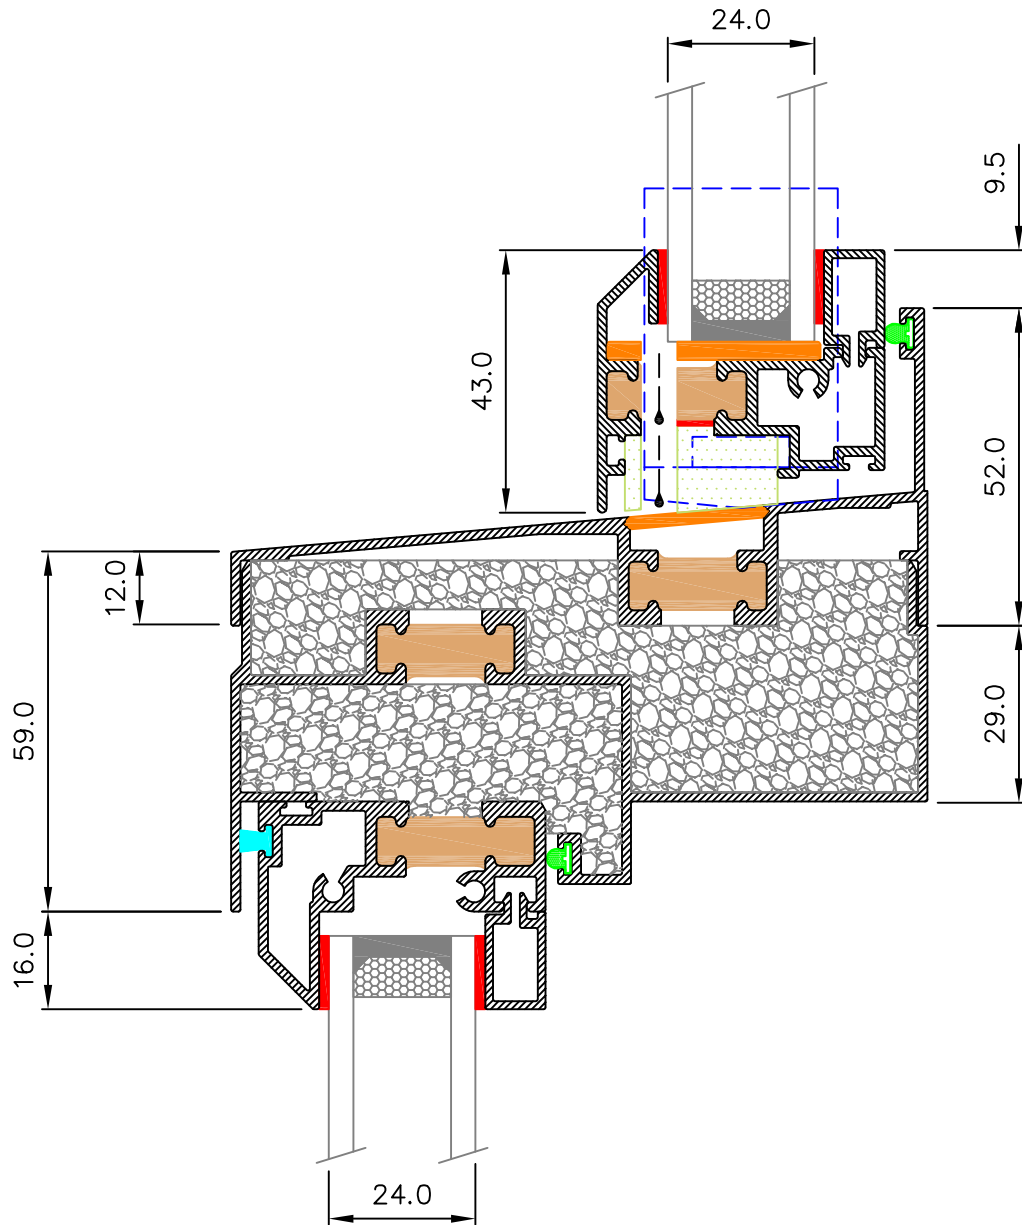


Sub Projection Cill




DURATION
WINDOWS

On A 150mm Sub Cill

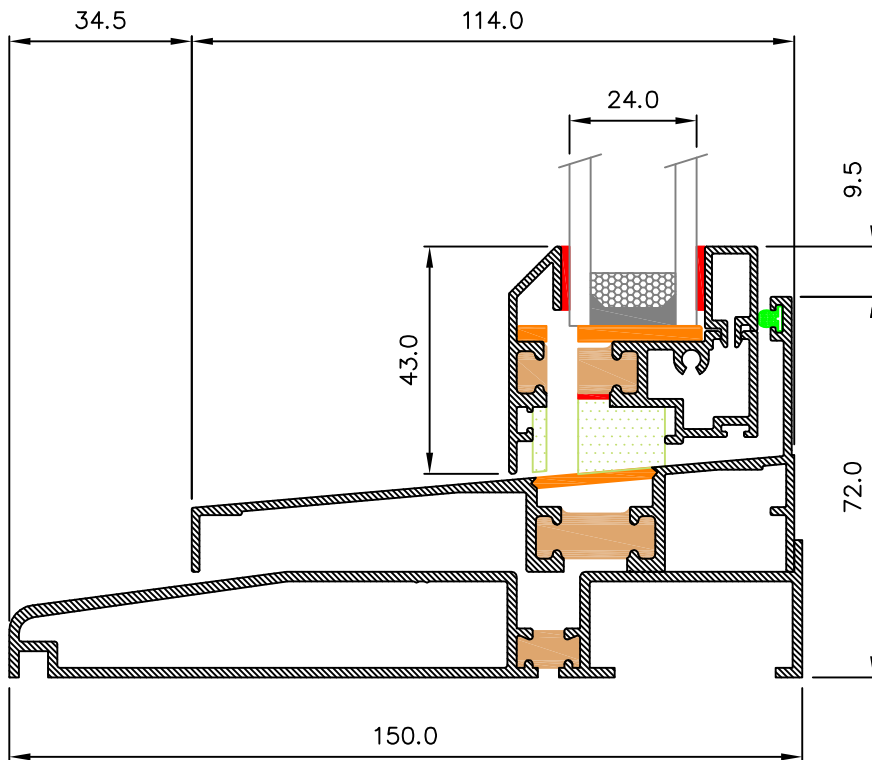


On A 150mm Sub Cill To Give 173mm Overall

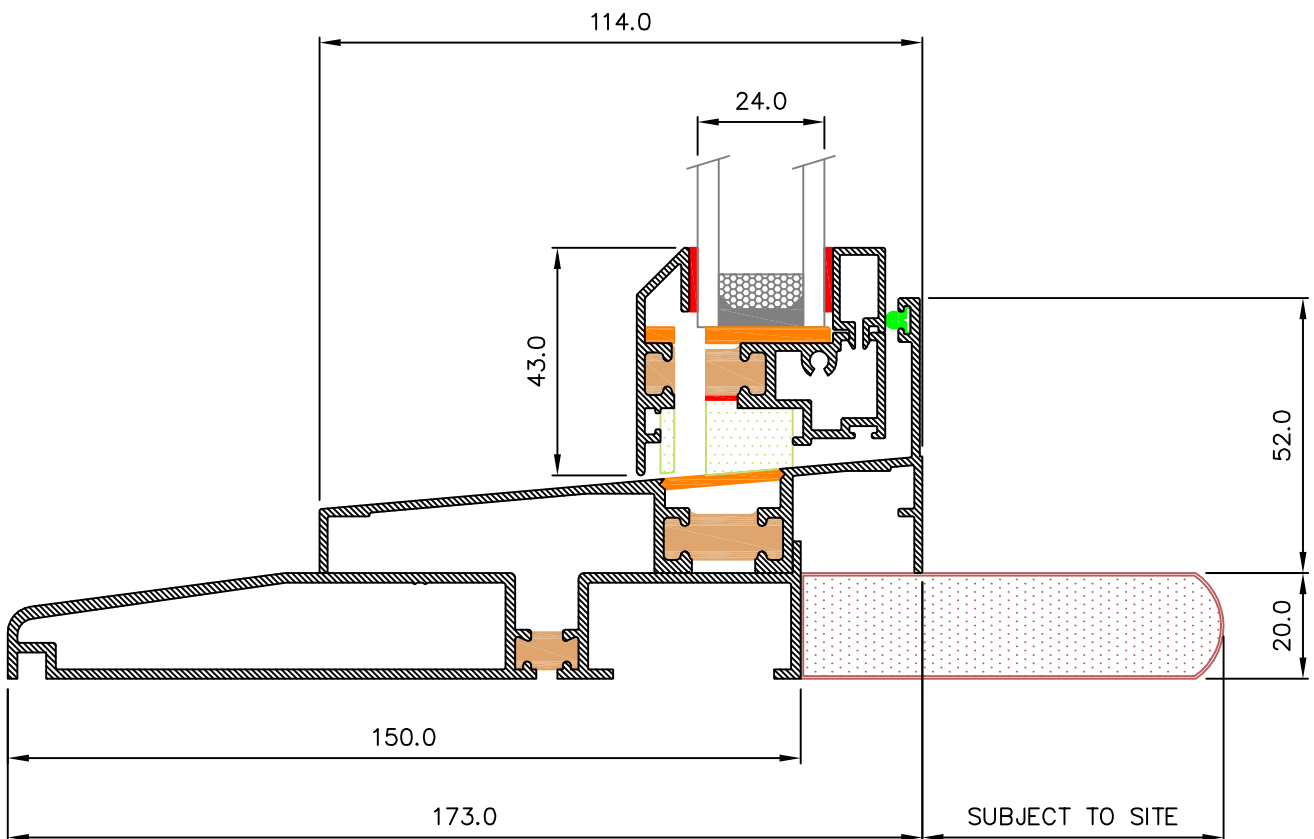




59mm Cill Add On Details

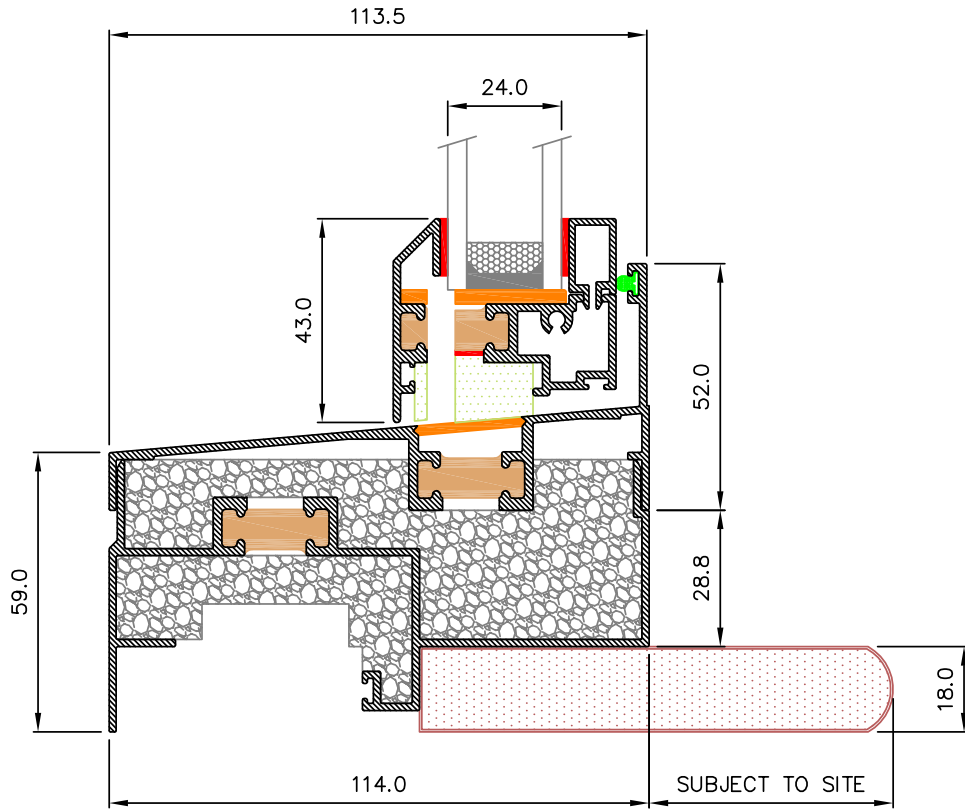


41mm Cill Add On Details

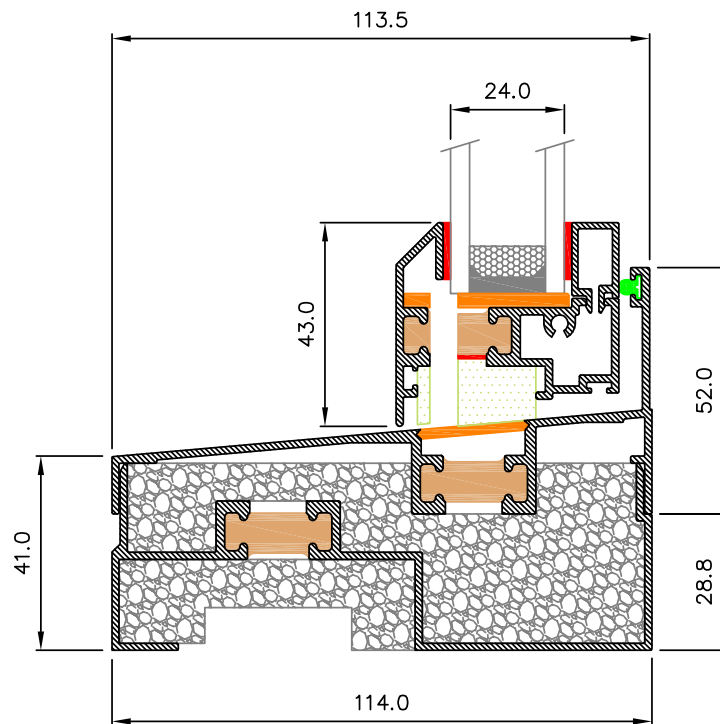



135° Degree Bay Details

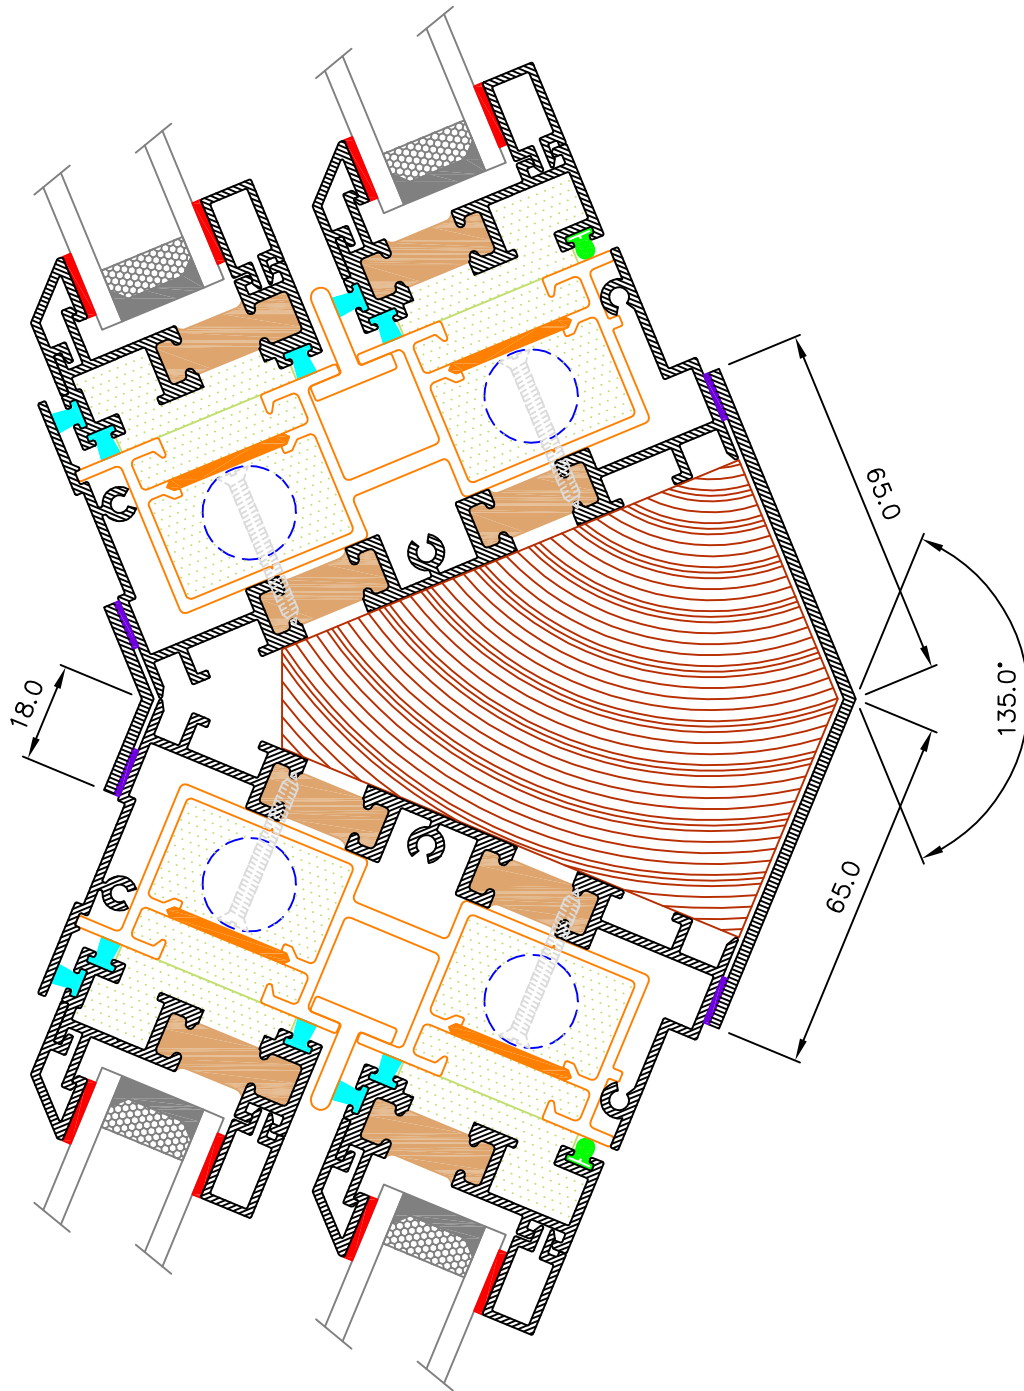


Liner Details



DURATION
WINDOWS

Typical Install Detail Using Head Liner & External Arch Add On

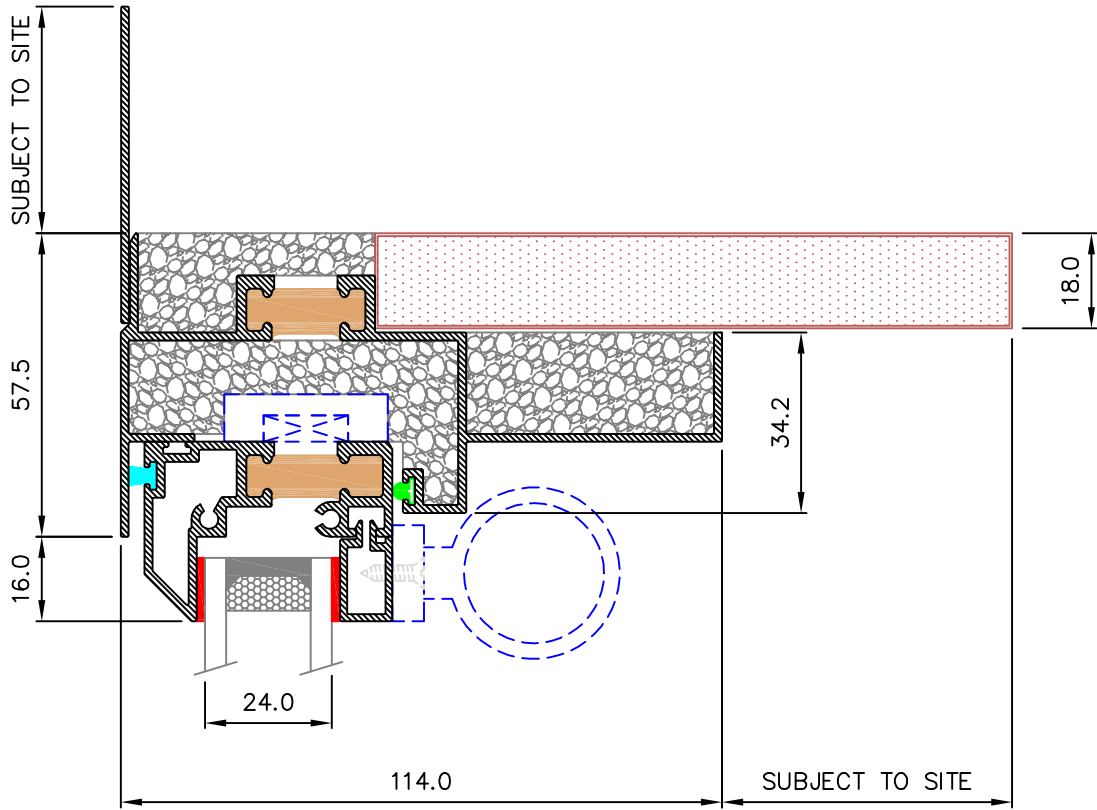

Typical Installation Detail Using 25mm Window Board

